


## 551-5169 R F Choke, moulded, axial, .022μH thru .1μH.

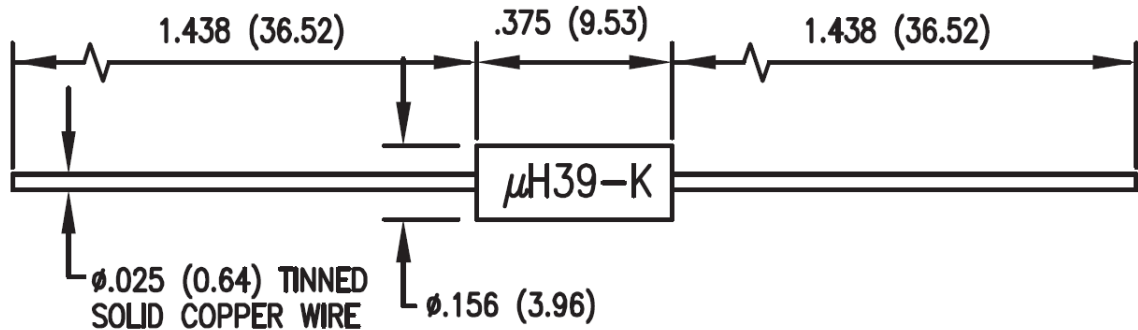

### How to order code

**551-5169-XX-YY-ZZ**

Basic Part No (XX = Inductance identifier, YY = tolerance, ZZ = packaging)

Basic Part No.	XX	Inductance	Body Marking Inductance & Tolerance	Q Min.	Test Freq. (MHz)	DCR Max. (W)	DC Max. (mA)	SRF Min. (MHz)
551-5169	-01	22nH	22nH-K	45	30	.0094	5400	940
	-02	27nH	27nH-K	45	30	.011	5000	940
	-03	39nH	39nH-K	45	25	.013	4600	850
	-04	56nH	56nH-K	45	25	.015	4300	730
	-05	68nH	68nH-K	45	25	.018	3900	660
	-06	82nH	82nH-K	45	25	.019	3800	620
	-07	μH10	μH10-K	45	25	.021	3600	600

### TOLERANCE (YY)

-02	±10%	K
-----	------	---

### PACKAGING (ZZ)

-00	Loose
-36	Taped

Temperature range: -55°C to +125°C