


# SOLDER TERMINALS - PTFE INSULATED, PRESS MOUNT, FEEDTHROUGH

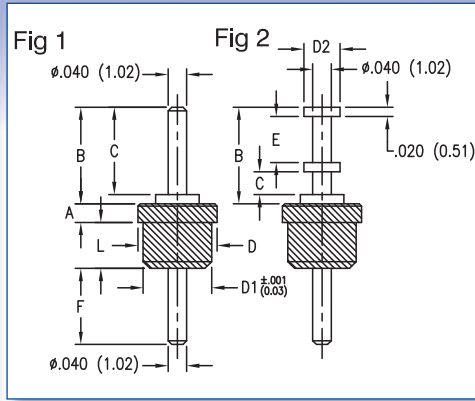

Dimensions in inches (mm)  
See page 91 for Mounting Instructions

**How to order code**

**571 - 4XXX - XX - XX - 19**

Basic Part No. | Insulator Colour | Terminal Finish

Material Code Table		
Component	Material	RoHS
Insulator	PTFE	✓
Terminal	Brass	✓

Finish Code Table		
Dash No.	Terminal Finish	RoHS
-01	Silver	✓
-04	Electro-Tin	✓
-05	Electro-Solder	X

Insulation Colour Code Table	
Dash No.	Colour
-19	White

Fig.	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	E	F	Mtg. Hole Diameter	Capacitance (pF)	Flashover (VRMS) at Sea Level
1	571-4282 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.190 (4.83)	.125 (3.18)	.094 (2.39)	-	-	.165 (4.19)	.083 (2.11)	0.7	1500
	571-4283 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.125 (3.18)	.105 (2.67)	.125 (3.18)	.094 (2.39)	-	-	.078 (1.98)	.083 (2.11)	0.5	1500
	571-4161 -01	.060 (1.52)	.016 (0.40) only	.040 (1.02)	.210 (5.33)	.190 (4.83)	.150 (3.81)	.126 (3.20)	-	-	.165 (4.19)	.113 (2.87)	0.7	3000
	-02	.100 (2.54)	.031 (0.79) to .062 (1.57)										0.8	3000
	571-4176 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.190 (4.83)	.172 (4.37)	.149 (3.78)	-	-	.165 (4.19)	.136 (3.45)	0.4	3000
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)										0.4	3000
	-03	.165 (4.19)	.031 (0.79) to .125 (3.18)										0.4	3000
	-04	.250 (6.35)	.031 (0.79) to .210 (5.33)										0.4	3000
	571-4177 -01	.100 (2.54)	.031 (0.79) to .062 (1.59)	.093 (2.36)	.210 (5.33)	.190 (4.83)	.172 (4.37)	.149 (3.78)	-	-	.166 (4.22)	.136 (3.45)	0.5	4000
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)										0.4	4000
-03	.165 (4.19)	.031 (0.79) to .125 (3.18)										0.4	4000	
571-4188 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.125 (3.18)	.105 (2.67)	.172 (4.37)	.149 (3.78)	-	-	.110 (2.79)	.136 (3.45)	0.7	2500	
571-4281 -01	.150 (3.81)	.031 (0.79) to .110 (2.79)	.125 (3.18)	.200 (5.08)	.180 (4.57)	.188 (4.78)	.165 (4.19)	-	-	.200 (5.08)	.152 (3.86)	0.7	4500	
2	571-4155 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.050 (1.27)	.125 (3.18)	.094 (2.39)	.080 (2.03)	.100 (2.54)	.150 (3.81)	.083 (2.11)	0.7	1500
	571-4185 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.050 (1.27)	.172 (4.37)	.149 (3.78)	.080 (2.03)	.100 (2.54)	.150 (3.81)	.136 (3.45)	0.7	2500
	571-4197 -01	.230 (5.84)	.031 (0.79) to .190 (4.83)	.125 (3.18)	.250 (6.35)	.096 (2.44)	.172 (4.37)	.149 (3.78)	.093 (2.36)	.094 (2.39)	.231 (5.87)	.136 (3.45)	0.8	4000

Colours available for volume requirements

