


# SOLDER TERMINALS - FLARED - SWAGE MOUNT

Dimensions in inches (mm)

See page 93 for recommended Anvil and Punch

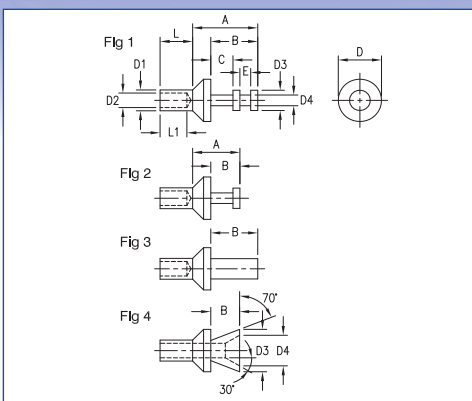

**How to order code**  
**180 - XXXX - XX - XX - 00**  
 Basic Part No. | Finish

Component	Material	RoHS
Terminal	Brass Leaded Red Brass*	✓ ✓

Dash No.	Finish	RoHS
-04	Electro-Tin	✓
-05	Electro-Solder	X

Fig.	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	D3	D4	E	L1	Mtg. Hole Diameter
1	180-2754 -01	.062 (1.57)	.031 (0.79)	.188 (4.78)	.136 (3.45)	.064 (1.63)	.125 (3.18)	.060 (1.52)	.042 (1.07)	.060 (1.52)	.031 (0.79)	.032 (0.81)	.040 (1.02)	.063 (1.61)
	-02	.094 (2.39)	.062 (1.57)											
	-03	.125 (3.18)	.094 (2.39)											
	-04	.156 (3.96)	.125 (3.18)											
	180-7337 -01*	.062 (1.57)	.031 (0.79)	.173 (4.39)	.136 (3.45)	.064 (1.63)	.094 (2.39)	.060 (1.52)	.042 (1.07)	.060 (1.52)	.031 (0.79)	.032 (0.81)	.040 (1.02)	.063 (1.61)
	-02*	.094 (2.39)	.062 (1.57)											
	-03*	.125 (3.18)	.094 (2.39)											
	-04*	.156 (3.96)	.125 (3.18)											
2	180-2753 -01	.062 (1.57)	.031 (0.79)	.136 (3.45)	.084 (2.13)	.064 (1.63)	.125 (3.18)	.060 (1.52)	.042 (1.07)	.060 (1.52)	.031 (0.79)	-	.040 (1.02)	.063 (1.61)
	-02	.094 (2.39)	.062 (1.57)											
	-03	.125 (3.18)	.094 (2.39)											
	-04	.156 (3.96)	.125 (3.18)											
	180-7336 -01*	.062 (1.57)	.031 (0.79)	.151 (3.84)	.114 (2.90)	.094 (2.39)	.094 (2.39)	.062 (1.57)	.042 (1.07)	.060 (1.52)	.031 (0.79)	-	.040 (1.02)	.063 (1.61)
	-02*	.094 (2.39)	.062 (1.57)											
	-03*	.125 (3.18)	.094 (2.39)											
	-04*	.156 (3.96)	.125 (3.18)											
3	180-2751 -01	.062 (1.57)	.031 (0.79)	.188 (4.78)	.136 (3.45)	-	.125 (3.18)	.060 (1.52)	.042 (1.07)	.060 (1.52)	-	-	.062 (1.57)	.063 (1.61)
	-02	.094 (2.39)	.062 (1.57)											
	-03	.125 (3.18)	.094 (2.39)											
	-04	.156 (3.96)	.125 (3.18)											
4	180-2755 -01	.062 (1.57)	.031 (0.79)	.136 (3.45)	.084 (2.13)	-	.125 (3.18)	.060 (1.52)	.042 (1.07)	.122 (3.10)	.090 (2.29)	-	-	.063 (1.61)
	-02	.094 (2.39)	.062 (1.57)											
	-03	.125 (3.18)	.094 (2.39)											
	-04	.156 (3.96)	.125 (3.18)											