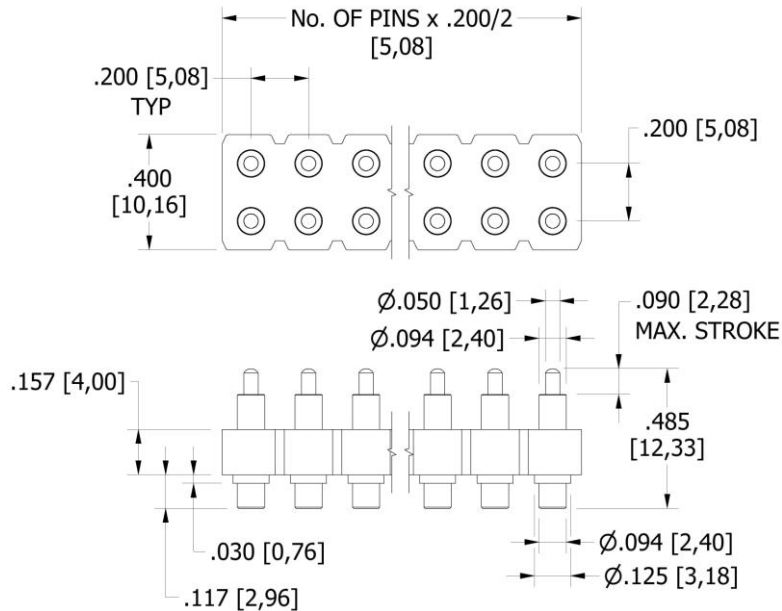


**703-8650 DIL Spring loaded contact**  
**Solder mount Ø.098 (2,50) hole****How to order code**  
**703-8650-XX-03-10**

No. of ways 04 thru' 20

**Materials:-**

Sleeve, Plunger, and Contact Body: Copper Alloy

Spring: Stainless Steel 302

Sleeve, Plunger, and Contact Body finish: .00002 (0.5um) Gold over Nickel

Spring finish: .00001 (0.25um) Gold over Nickel

Insulator: Nylon 46

Durability: 1,000,000 cycles

Rated Current (Free Air): 9A continuous @ 10° DT

Contact Resistance: 20mΩ Max.



RoHS Compliant